


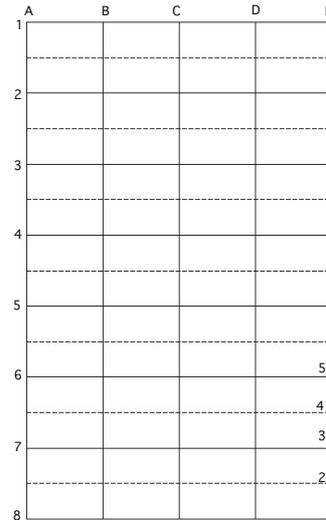


TRIATHLON RW SPECTRA

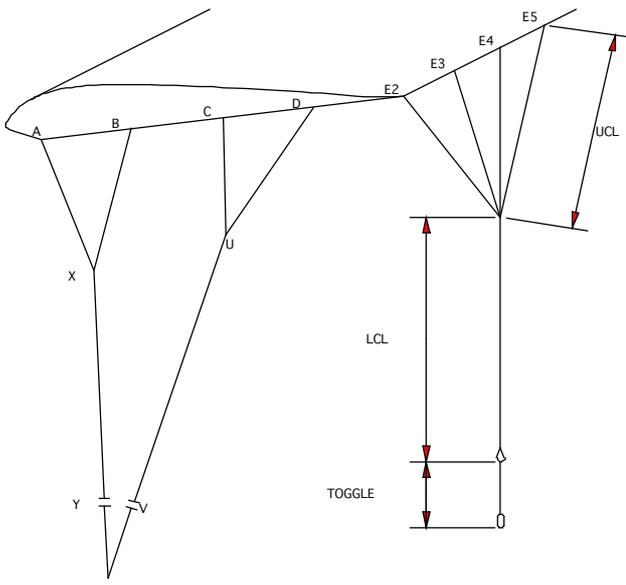

ENSURE LOOPS ARE HELD EVENLY AND SECURELY. EACH LINE TO BE LOADED TO 10LBS DURING MEASUREMENT. MEASURE THE DEPLOYMENT BRAKE SETTING WITH THE TOGGLES STOWED. MEASURE THE FULL FLIGHT SETTING WITH THE TOGGLES UNSTOWED.

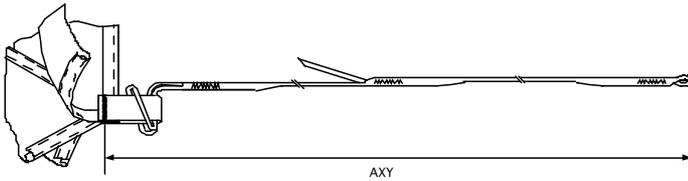

MEASURE FROM END OF SUSPENSION LINE LOOP TO BARTACK ON SUSPENSION LINE ATTACHMENT TAB.

Canopy	99	110	120	135	150	160	175	190
AXY	2382	2510	2630	2802	2945	3025	3152	3290
BXY	2427	2549	2675	2842	2990	3075	3210	3350
XY	1615	1697	1785	1890	2000	2015	2150	2215
CUV	2572	2694	2830	3017	3170	3260	3400	3550
DUV	2787	2913	3060	3257	3425	3525	3680	3840
UV	1960	2061	2170	2300	2435	2465	2620	2690
LCL	1800	1891	1980	2100	2200	2770	2830	2480
TOGGLE	390	415	470	480	530	515	540	530
E2	2590	2737	2870	3030	3190	3290	3440	3590
E3	2590	2737	2870	3030	3190	3290	3440	3590
E4	2590	2737	2870	3030	3190	3290	3440	3590
E5	2690	2862	3000	3060	3320	3434	3630	3785

Deployment Brake Setting								
E4-A4	150	100	130	115	140	150	150	190
Full Flight Setting								
E4-D4	160	113	160	135	160	165	160	190

Above A

Above D

All dimensions in mm